


# EXCELTOPIC-380™

Desktop Short-Run On-Demand Specialty  
Finishing POD Laminator with

SLEEKERDIGITAL™



Max. Speed  
22' per minute



5 minute  
Warm Up



15 amp / 220volt  
NEMA 6-15 plug



## GVDIRECT™

Finish Well

GVDirect™ diligently works to ensure our performance lineup of laminate films, digital technologies, equipment, and all things finishing work for our customers to gain consumer attention and market share. GVDirect™ diligently endeavors to deliver value in service, product, and equipment that surpass market demands, support productivity, and uphold social and environmental integrity.

1.877.526.6848


[gvdirect.com](http://gvdirect.com)

# EXCELTOPIC-380™

The ExcelTopic-380™ is a compact on-demand single-sided specialty finishing system. With maximum sheet size capabilities up to 15"W x 31.5"L this unit is an excellent complement for any print engine on the market today. Adjustable de-curling system creates consistently flat output and the automatic separation system ensures perfectly separated sheets. SleekerDigital™ comes standard with this laminator, technology that bonds to digital output presenting a vast array of finishing options including variable data spot foiling, spot gloss, and spot holographic special effects. The high pressure nip roller system on this laminator gives superior results to most comparable machines with spring pressure roller systems. The ExcelTopic-380™ outstanding versatility, ease of use, and ability to add value to print has never been easier and more economical.



**SleekerDigital™ Technology bonds metallic foils, spot gloss and holographic effects to digital print.**

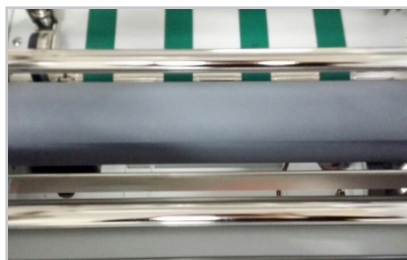

**Adjustable on th fly decurling device for lay-flat output.**



**Semi-Automatic feeder, and automatic sheet separator.**

	Specifications
Sheet Size	Min. 9" x 7" / Max. 15" x 31.5"
Substrate	150 - 400 g/m <sup>2</sup>
Speed	up to 22' per min.
Film Core	3"
Laminate Films	Performance™ Series, Talent™ Series, SleekerDigital™ (Foil, Gloss, Matte, Holographic)
Temperature	Max. 150°C (302°F)

	Specifications
Warm Up Time	5 Minutes
Heating System	Infrared Heating Technology
Pressure Control	Cam Lock
Features	De-curling System / Automatic Separation
Electrical	15 amp / 220volt, NEMA 6-15 plug
Dimensions	24.8"L x 27.5"W x 22"H

Note: The information given above is believed to be true and accurate and is not intended to violate any statutory condition or right of a third party. GVDirect™ makes no warranty, express or implied, as to the fitness of the products for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification.

GVDirect™ offers a complete lineup of laminate films and SleekerDigital™ products that work brilliantly with our equipment. Visit us online or contact us directly for details and pricing.

