



# LAMIBIND 340 PUR

Unique Closed **PUR-Melt**  
Semi-Automatic Binding System



**Book Size**  
Length 3.15"-13"  
Width 0.4"-1.57"  
Height 3.14"+



**Cover Size**  
Length 3.15"-13.38"  
Width 6.29"-35.43"  
Thickness 80-300 gms



20-25 minute  
Warm Up



**GVDIRECT™**  
Finish Well


GVDirect™ diligently works to ensure our performance lineup of laminate films, digital technologies, equipment, and all things finishing work for our customers to gain consumer attention and market share. GVDirect™ diligently endeavors to deliver value in service, product, and equipment that surpass market demands, support productivity, and uphold social and environmental integrity.

1.877.526.6848

[gvdirect.com](http://gvdirect.com)

# LAMIBIND 340 PUR

The LAMIBIND 340 PUR-Melt semi automatic bookbinding machine is the world's most cost effective professional semi-automatic PUR binder. Ideally suited for short run A4-A5 books it shares the same closed PUR application system which has made RIGO binders the envy of all other digital PUR binding manufacturers.

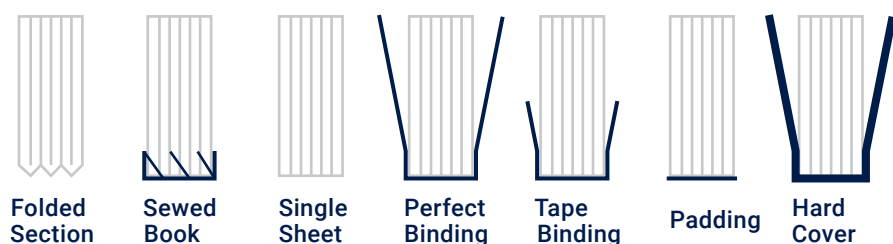

|                      | Specifications  |
|----------------------|---|
| Size Bound Document  | Min. 3.15"L x 6.29"W<br>/ Max. 13.38"L x 35.43"W  |
| Substrate            | 80 - 300 gsm  |
| Speed                | up to 290 working cycles / hour   |
| Warm Up Time         | 20-25 min.  |
| Spine Preparation    | Fixed Milling and Notching (0.019")   |
| Binding              | Folded Section / Sewed Book<br>/ Single Sheet / Perfect Binding<br>/ Padding / Hard Cover / Tape Binding (Optional) |
| Melt Temperature     | 100-200°C (212-392°F)   |
| PUR Container Volume | Cartridge System (500g Capacity)  |
| Gluing Unit          | Adjustable Length of the Glue Application (Glue Cut off)<br>/ PUR Nozzle Adjustable Height<br>/ 2 PUR Heating Zones |

|            | Specifications   |
|------------|--|
| Features   | Touch Screen / Standby Mode<br>/ RIGO Operating Software with Online Updates / Paper Dust Extraction / Large Cover Holder and Skew Adjustment / Cover Sensor / Binding Cycle Counter                     |
| Dimensions | 56.69"L x 32.48"W x 48.62"H  |
| Air Supply | Compressed   |
| Electrical | 1~230 V-50 Hz / 200-220 V-60 Hz<br>/ 100-120 V 60Hz  |
| Options    | Glue Level Indication for PUR / Glue Level Indication / Automatic Carriage Start / Mill Unit Off Switch / Tilttable Milling Unit / Tape Binding / Magnetic Book Holder / Side Shelf / Large Cover Holder |

Note: The information given above is believed to be true and accurate and is not intended to violate any statutory condition or right of a third party. GVDirect™ makes no warranty, express or implied, as to the fitness of the products for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification.

GVDirect™ offers a complete lineup of binding supplies that work flawlessly with our equipment. Visit us online or contact us directly for details and pricing.