

KOMFI® DELTA 52

Available in
Canada



Commercial Laminating Machine

The Delta 52 laminator is well-known as the legendary machine that revolutionized one-sided laminating. The Delta 52 consistently delivers. Continually updated and improved, the current Delta easily keeps its place as the benchmark for all production one-sided laminators.



Max. Speed
82' per minute
Top Feed
50' per minute
Bottom Feed



GVDIRECT™

Finish Well

GVDirect™ diligently works to ensure our performance lineup of laminate films, digital technologies, equipment, and all things finishing work for our customers to gain consumer attention and market share. GVDirect™ diligently endeavors to deliver value in service, product, and equipment that surpass market demands, support productivity, and uphold social and environmental integrity.

1.877.526.6848


gvdirect.com

KOMFI® DELTA 52

Available in
Canada



Commercial Laminating Machine

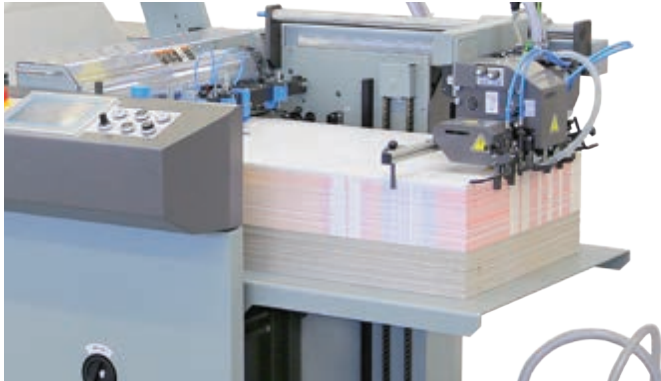

INTEGRATED DEEP PILE FEEDER

Automatic sheet feeding with Komfi® designed high-performance feeding head.



CENTRALIZED CONTROL CENTER

Intuitively designed control center is easy to access and use.

BASIC CONFIGURATION

- ❑ Automatic feeder with fixed lifting table
- ❑ Single action Komfi feeding head
- ❑ Vacuum pump
- ❑ Automatic sheet overlap control
- ❑ Mis-feeding detection
- ❑ Laminating cylinder heated by 3-zone electro-resistance heater
- ❑ Temperature drop detection
- ❑ Polyurethane pressure roller
- ❑ Air pressure decrease detector
- ❑ Air shaft for film unwinding
- ❑ Combined de-curling unit (bar and roller)
- ❑ Automatic sheet separation using built-in perforator
- ❑ Pneumatic snapping unit is electronically controlled
- ❑ Speed adjustable separating roller
- ❑ Sheet separation detector
- ❑ Fixed delivery desk

TECHNICAL PARAMETERS

Description	Specifications
Dimension	105"L x 49"W x 57"H
Max. Laminating Speed	115 ft/min
Maximum Output	3180 sheets/hr (20" x 26")
Minimum Sheet Dimensions	7.9" x 7.9"
Maximum Sheet Dimensions	21.3" x 29.9"
Paper Weight Range	60 lb. text - 18 pt. cover
Thickness of Laminating Film	1.0 - 2.2 mil
Kind of Laminating Film	OPP, PET, Nylon
Warm Up Time	3 minutes
Sheet Overlap Accuracy	± 1/16"

GVDIRECT™

Finish Well

GVDirect™ diligently works to ensure our performance lineup of laminate films, digital technologies, equipment, and all things finishing work for our customers to gain consumer attention and market share. GVDirect™ diligently endeavors to deliver value in service, product, and equipment that surpass market demands, support productivity, and uphold social and environmental integrity.

1.877.526.6848

gvdirect.com